




37397C

MODEL: GBT Ka WR19-MS DATE: 03/19/2010 10:22 Page 1
DEVICE ID: OPERATOR:

START: 24.000000000 GHz GATE START: - ERROR CORR: 12-TERM
STOP: 34.000000000 GHz GATE STOP: - AVERAGING: 1 PT
STEP: 0.025000000 GHz GATE: - IF BNDWDTH: 1 KHz
WINDOW: -


PARAMETER: CH1 -S21- CH3 -S11-
NORMALIZATION: OFF OFF
REFERENCE PLANE: 0.0000 mm 0.0000 mm
SMOOTHING: 0.0 PERCENT 0.0 PERCENT
DELAY APERTURE: - -

S21 FORWARD TRANSMISSION
LOG MAGNITUDE REF=-5.000 dB 1.000 dB/DIV

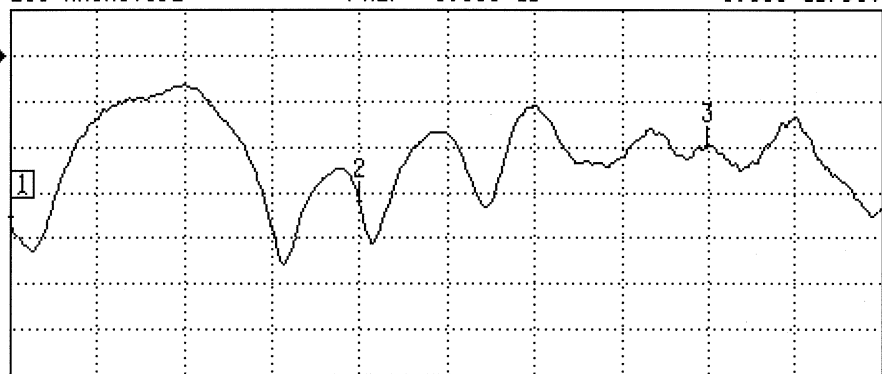

24.000000000 GHz 34.000000000

S11 FORWARD REFLECTION
LOG MAGNITUDE REF=0.000 dB 5.000 dB/DIV

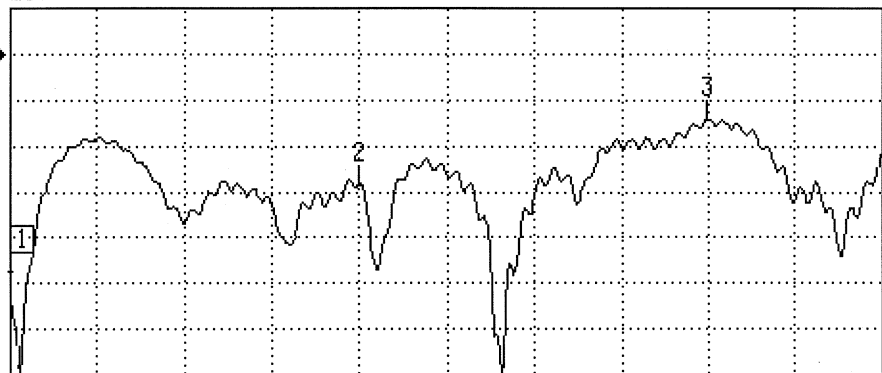

24.000000000 GHz 34.000000000

CH 1 - S21
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 1
24.000000000 GHz
-8.558 dB


MARKER TO MAX
MARKER TO MIN

2 28.000000000 GHz
-8.197 dB

3 32.000000000 GHz
-6.985 dB

MARKER READOUT
FUNCTIONS

High freq LO pwr divider



Cover on
Divider only, no attenuators