




37397C

MODEL: GBT Ka WR19-MS DATE: 03/19/2010 10:25 Page 1
 DEVICE ID: OPERATOR:

START: 24.000000000 GHz GATE START: - ERROR CORR: 12-TERM
 STOP: 34.000000000 GHz GATE STOP: - AVERAGING: 1 PT
 STEP: 0.025000000 GHz GATE: - IF BNDWDTH: 1 KHz
 WINDOW: -

PARAMETER:	-----CH1-----	-----CH3-----
NORMALIZATION:	-S21-	-S22-
REFERENCE PLANE:	OFF	OFF
SMOOTHING:	0.0000 mm	0.0000 mm
DELAY APERTURE:	0.0 PERCENT	0.0 PERCENT
	-	-

S21 FORWARD TRANSMISSION
 LOG MAGNITUDE REF = -10.000 dB 5.000 dB/DIV

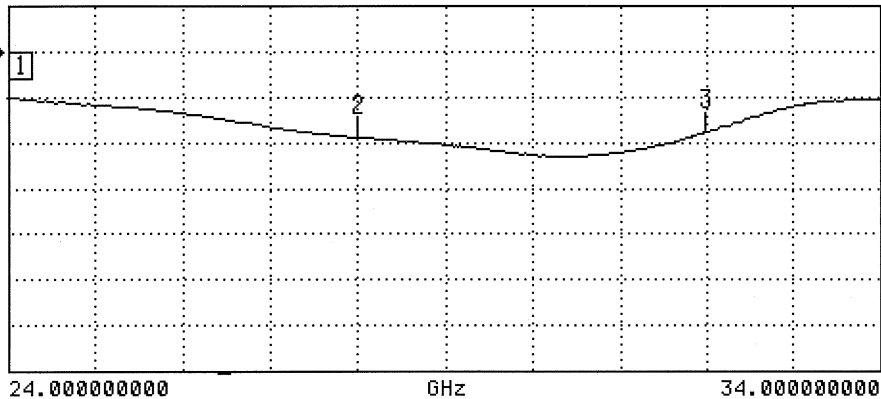

CH 3 - S22
 0.0000 mm REF
 0.000 dB OFFSET
 0.00° OFFSET


MARKER 1
 24.000000000 GHz
 -14.237 dB

MARKER TO MAX
 MARKER TO MIN

2 28.000000000 GHz
 -12.290 dB

3 32.000000000 GHz
 -9.510 dB

S22 REVERSE REFLECTION
 LOG MAGNITUDE REF = 0.000 dB 5.000 dB/DIV

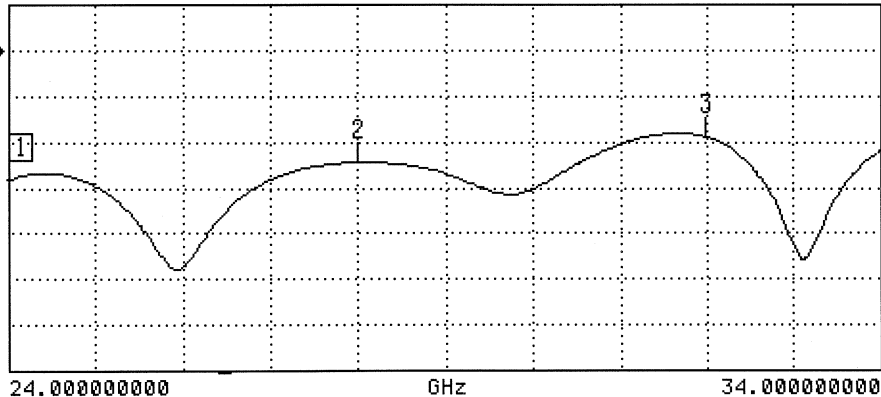

MARKER READOUT
 FUNCTIONS

High freq LO pur divider

Output port, isolation

Cover off

Divider only, no attenuators

